

PRODUCT SPECIFICATION

- 600x600 sheet steel coated with white quality polyester
- Aluminium Matt reflector + Double parabolic louvers
- RAL 9003
- Side air vents for self-cleaning
- Dimmable (DALI) and Non Dimmable option)

ELECTRONIC CONTROL GEAR

Constant Current SELV LED Driver

2-channel independent output

Reference:

- DALI (EDD): CCD235-35LS-01/220-240/DALI / BAG
- ON/OFF (ET): CCS235-35LS-01/220-240 / BAG

ELECTRICAL CONNECTION

3P Push-in Terminal Block + easy opening door

Standard G5 lamp-holders

DIMENSIONS

597(A)x597(B)x60 mm


WEIGHT

4.2 Kg

OPERATING TEMPERATURE

-25 °C ~ 50 °C

Dim.




EXCHANGEABLE LEDT5 GLASS LAMP

- EXTRA LOW VOLTAGE SAFETY
- WIDE BEAM LIGHT DISTRIBUTION
- SIMPLE AND RELIABLE WIRE CABLE CONNECTION
- SURFACED OR SUSPENDED MOUNTING
- Accessory for Gypros Ceiling under request

5 YEAR WARRANTY

PRODUCT SPECIFICATION

- **LIGHT OUTPUT RATIO**
LOR 80%
- **LAMP POWER**
4x8W
- **SYSTEM POWER**
36 W
- **SAFETY**
Class I / SELV

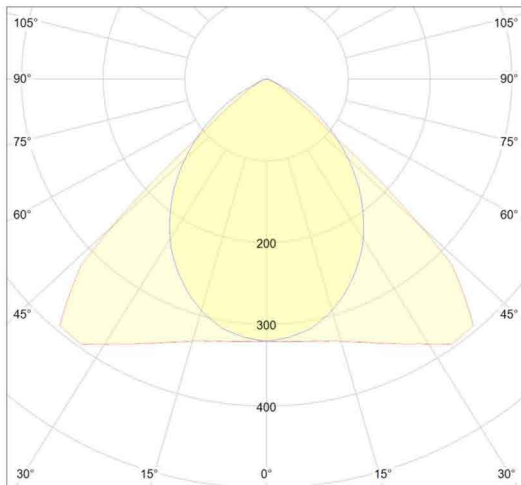

APPLICATION

OFFICES BUILDING

